


U.S. TSUBAKI STANDARD ATTACHMENT CHAIN

Conveyor Series

DOUBLE PITCH ROLLER CHAINS



These chains provide a high quality conveying medium for material handling equipment, road building machinery, textile machinery, farming implements, baking, packaging, and bottling equipment.

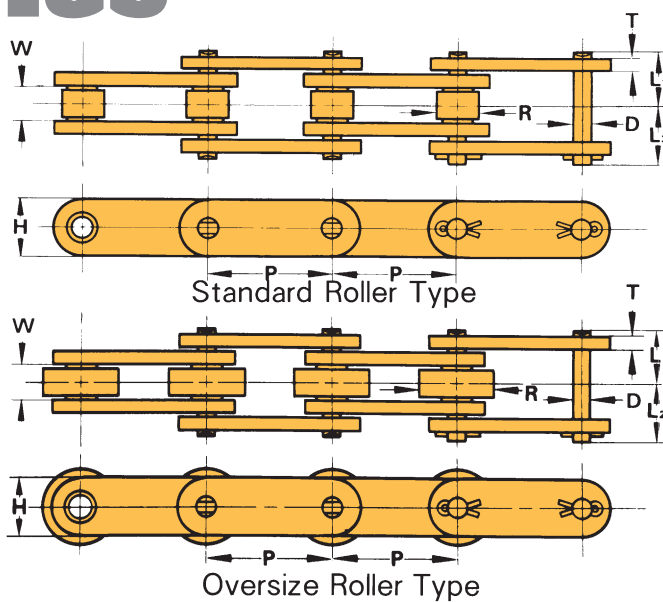

U.S. TSUBAKI Chain No.	Pitch	Roller Diameter	Width Between Roller Link Plates	Pin		Link Plate		Average Tensile Strength lbs.	Max. Allowable Load lbs.	Approx. Weight lbs./ft.	No. of Links per 10 ft.	
	P	R	W	D	L ₁	L ₂	T					H
STANDARD ROLLER TYPE												
C2040	1.000	.312	.312	.156	.325	.380	.060	.472	3,750	595	.34	120
C2050	1.250	.400	.375	.200	.406	.469	.080	.591	6,170	970	.56	96
C2060H	1.500	.469	.500	.234	.573	.652	.125	.677	9,040	1,410	1.01	80
C2080H	2.000	.625	.625	.312	.720	.823	.156	.906	15,400	2,400	1.62	60
C2100H	2.500	.750	.750	.375	.858	.965	.187	1.126	24,300	3,840	2.38	48
C2120H	3.000	.875	1.000	.437	1.061	1.203	.219	1.354	34,000	5,380	3.41	40
C2160H	4.000	1.125	1.250	.562	1.337	1.514	.281	1.898	58,000	9,190	6.02	30
OVERSIZE ROLLER TYPE												
C2042	1.000	.625	.312	.156	.325	.380	.060	.472	3,750	595	.58	120
C2052	1.250	.750	.375	.200	.406	.469	.080	.591	6,170	970	.87	96
C2062H	1.500	.875	.500	.234	.573	.652	.125	.677	9,040	1,410	1.47	80
C2082H	2.000	1.125	.625	.312	.720	.823	.156	.906	15,400	2,400	2.37	60
C2102H	2.500	1.562	.750	.375	.858	.965	.187	1.126	24,300	3,840	3.90	48
C2122H	3.000	1.750	1.000	.437	1.061	1.203	.219	1.354	34,000	5,380	5.46	40
C2162H	4.000	2.250	1.250	.562	1.337	1.514	.281	1.898	58,000	9,190	9.21	30

- Note: 1. Refer to pages B-3 and B-4 for chains with attachments.
 2. Heavy side plates are used for C2060(2)H and up.
 3. Spring clip type connecting links will be provided for C2040 ~ C2060H and C2042 ~ C2062H, unless otherwise specified.

✳ **Sprockets for RS and Double Pitch Roller Conveyor Chain.**

There are special sprockets for RS and Double Pitch Roller Conveyor Chains. However, ANSI standard sprockets may be used if the roller is a standard small roller and the number of sprocket teeth is greater than 30. Contact U.S. Tsubaki for details of special sprockets.